

Klassic - LTKL 100



Self bunded double wall design with

- · Fluid level dipstick for tank and interstitial space
- Vent pipe for tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway
- Warranty 5 years structural, 1 year on valves (conditions apply)

Options include:

- Inspection ladder
- Clip-on pump bay
- Dispensing and fuel management

Specifications

Description

Capacity SFL, litres 94,500 (USG - 24,967, IG - 20,788)

Capacity GFL, litres 99,800 (USG - 26,367, IG - 21,953)


Length, mm 14,630 (48 ft)

Width, mm 2,438 (8 ft)

Height, mm 3,200 (10.5 ft)

Tare Weight, Kg 18,600**

Compliance AS1940, AS1692, S1657, UL142, ULCS601, ***BS799-5

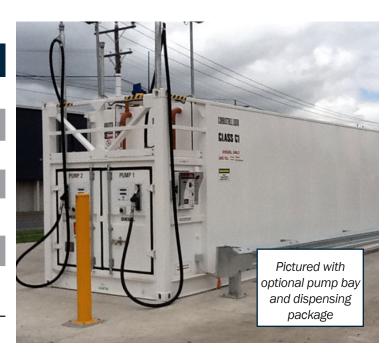

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras

^{**} Tank weights are approximate

^{***} BS799-5 available upon request