

Klassic - LTKL 75



Self bunded double wall design with

- Fluid level dipstick for tank and interstitial space
- Vent pipe for tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm
- Corner container lock castings for ease of transport
- Access manway
- Warranty 5 years structural, 1 year on valves (conditions apply)


Options include:

- Inspection ladder
- Multiple compartments
- Clip-on pump bay
- Dispensing and fuel management

Specifications

Description	
Capacity SFL, litres	70,550 (USG - 18,639, IG - 15,519)
Capacity GFL, litres	74,312 (USG - 19,633, IG - 16,347)
Length, mm	12,192 (40 ft)
Width, mm	2,438 (8 ft)
Height, mm	2,896 (9.5 ft)
Tare Weight, Kg	14,500**
Compliance	AS1940, AS1692, S1657, UL142, ULCS601, ***BS799-5

^{**} Tank weights are approximate

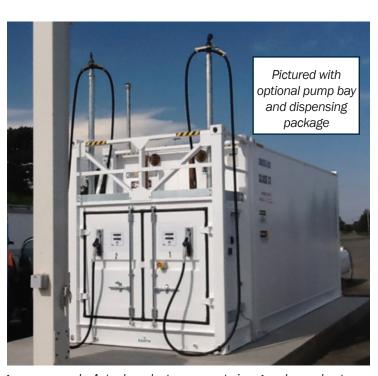

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras

^{***} BS799-5 available upon request